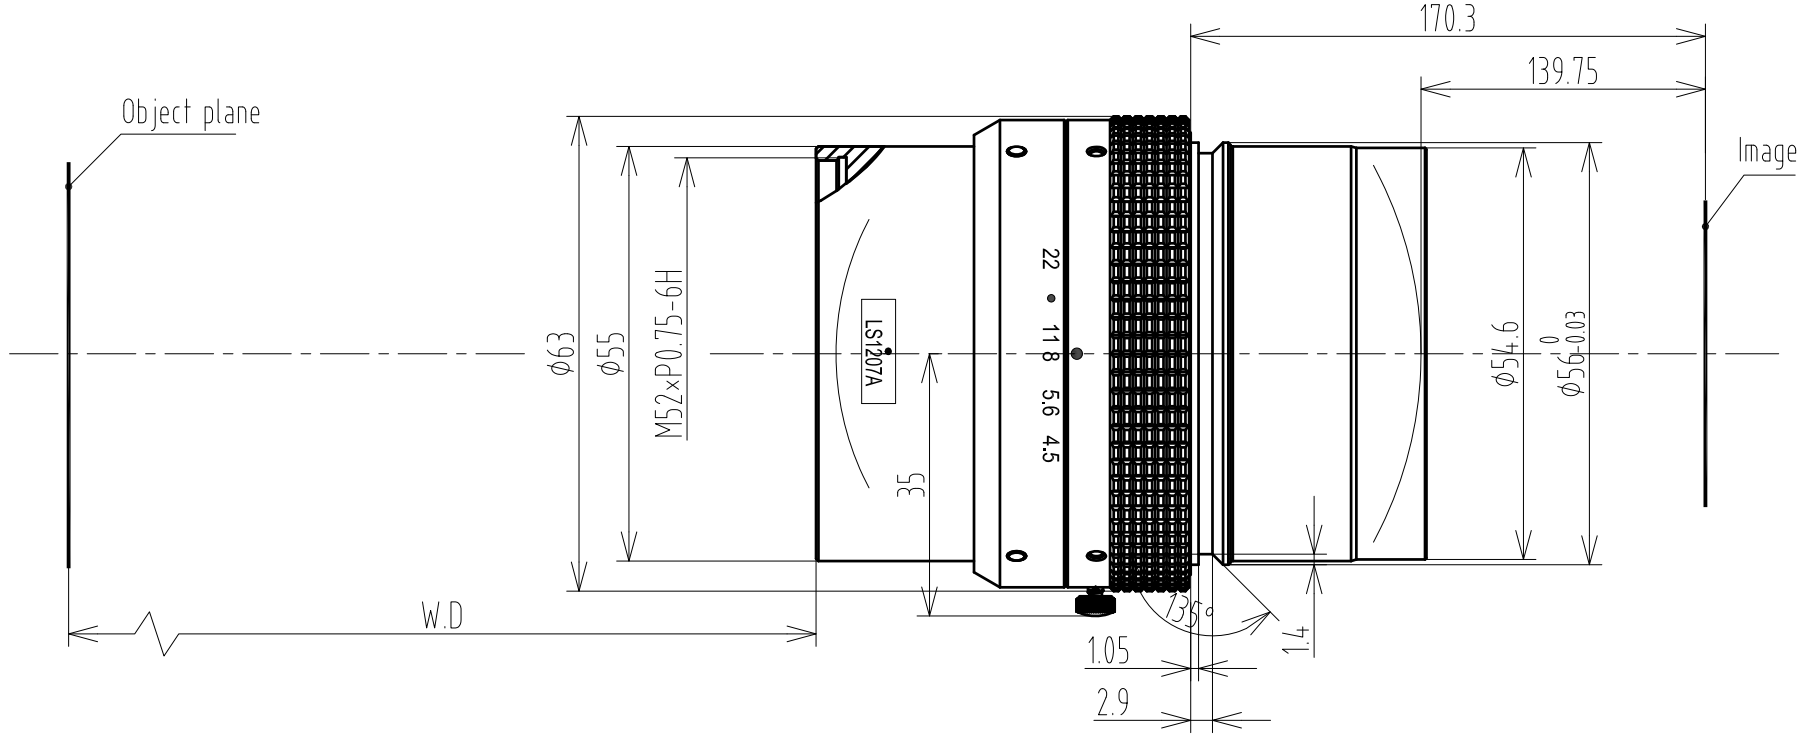


Main Specification			
Magnification	0.7X	0.75X	0.85X
Working Distance	220.9±5	209.8±5	191.4±5
Image Distance	133.96±2.5	139.75±2.5	151.58±2.5
Conjugate Distance	435.1±9	429.85±9	423.2±9
Flange Focal Distance	164.5	170.3	182.2
Max image	ϕ62		
F/#	4.5		
EFL	116		
FOV	29°		
ENP Diameter	25		
Distortion	<0.005%		
IMAGE QUALITY			
AXIS	ϕ46.2	ϕ66	

Image space NA	0.066
Object space NA	0.05
Entrance pupil diameter	25
Entrance pupil position	39.27
Exit pupil diameter	30.93
Exit pupil position	-233.29

注：

Logo上的圆点粘贴位置与成像面垂直为最佳成像点。

标记	处数	更改文件号	担当	变更日期

TOLERANCE:
. LINEARITY TOLERANCES ±0.05
. ANGULAR TOLERANCES ARE±30'
. DRAFT ANGLES AREA±0.5°/SIDE

三角法

设计	朱周德	2017-03-30	名称	LS1207A技术规格图
校对				
审核			代号	LS1207A-SPEC
批准				

材料(环保)	单位	比例
	mm	1:1

页码	版本
1/1	V0

CHIOPT

A4