


Main Specification			
Max image	φ6.8		
F.No	1.8±5%		
EFL	2.8±5%		
CRA	9.4°		
FOV(°) (IMX290 Sensor)	H	V	D
	(5.568mm)	(3.132mm)	(6.388mm)
	110.2°	62.7°	125.4°
FOV(°) (IMX238 Sensor)	H	V	D
	(4.8mm)	(3.84mm)	(6.15mm)
	95.5°	76.8°	123°
FOV(°) (IMX322 +0.5mm)	H	V	D
	(5.876mm)	(3.524mm)	(6.668mm)
	116°	70.5°	130.6°
FOV(°) (IMX291 +0.5mm)	H	V	D
	(6.068mm)	(3.632mm)	(6.888mm)
	119.6°	72.6°	134.5°
FFL(Cover glass(t=0.5)in +IR(t=0.6))	5.91±0.3		
BFL(Cover glass(t=0.5)in +IR(t=0.6))	5.98±0.3		
TTL	23.2±0.2		
TV Distortion	<-25.9%@1/2.7"		
	<-21%@1/3"		
	50%@1/2.5"		
Relative illumination	50%@1/2.7"		
	6G		
Resolution	Center:200lp/mm		
	0.7γ:100lp/mm		
SURFACE QUALITY			
Center	80-50		
Margin	80-50		

TOLERANCE: LINEARITY TOLERANCES +0.05 ANGULAR TOLERANCES ARE+30° DRAFT ANGLES AREA+0.5°/SIDE				三角法		材 料 (环 保)		单 位	比 例
设计				校 对		名称		CV0228D 规格书	5:1
审核				审 核		部 番		CV0228D -SPEC	1/1
批准				批 准		商 品 代 号			版 本
版本				处 数		更改文件号		担当	变更日期
5				6		7		8	9

23.2±0.2(TTL)			
23.27±0.2			
17.57±0.2			
9.3±0.2			
0.6			
0.5			
φ11			
M12xP0.5-JIS2级			
Cover glass			
Image			
IR			
5.91±0.3			
5.98±0.3			
3.61			
φ15.0 ⁰ _{-0.1}			
125.4°			

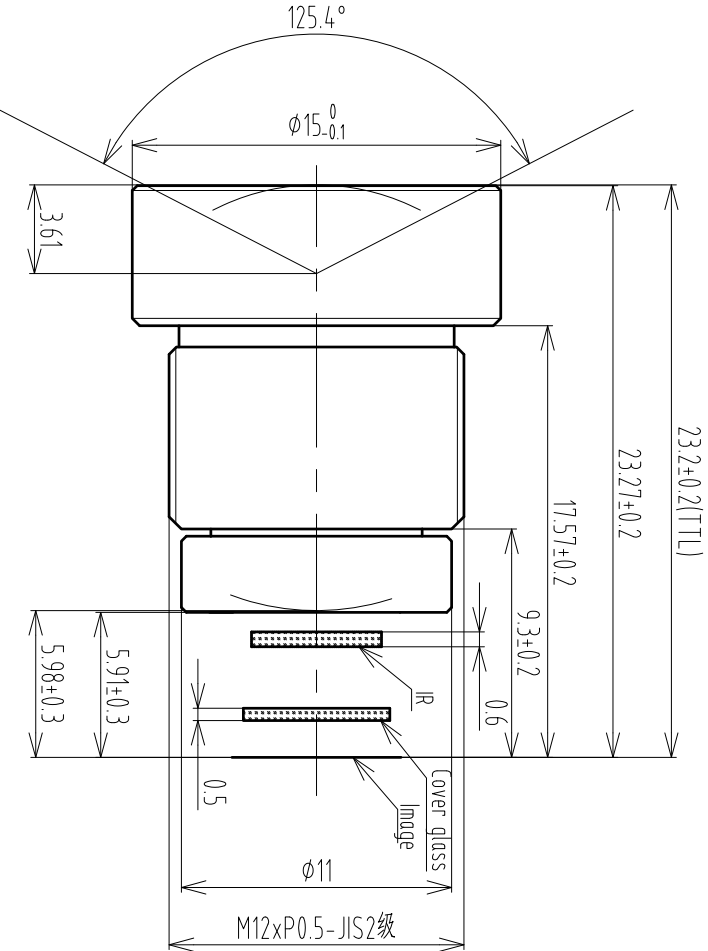

TOLERANCE:				三角法		材料 (环保)		单位	比例
LINEARITY TOLERANCES ± 0.05				设计		名称		mm	5:1
ANGULAR TOLERANCES ARE $\pm 30^\circ$				校对		规格书			
DRAFT ANGLES AREA $\pm 0.5^\circ$ SIDE				审核		番番			
				批准		商品代号			