

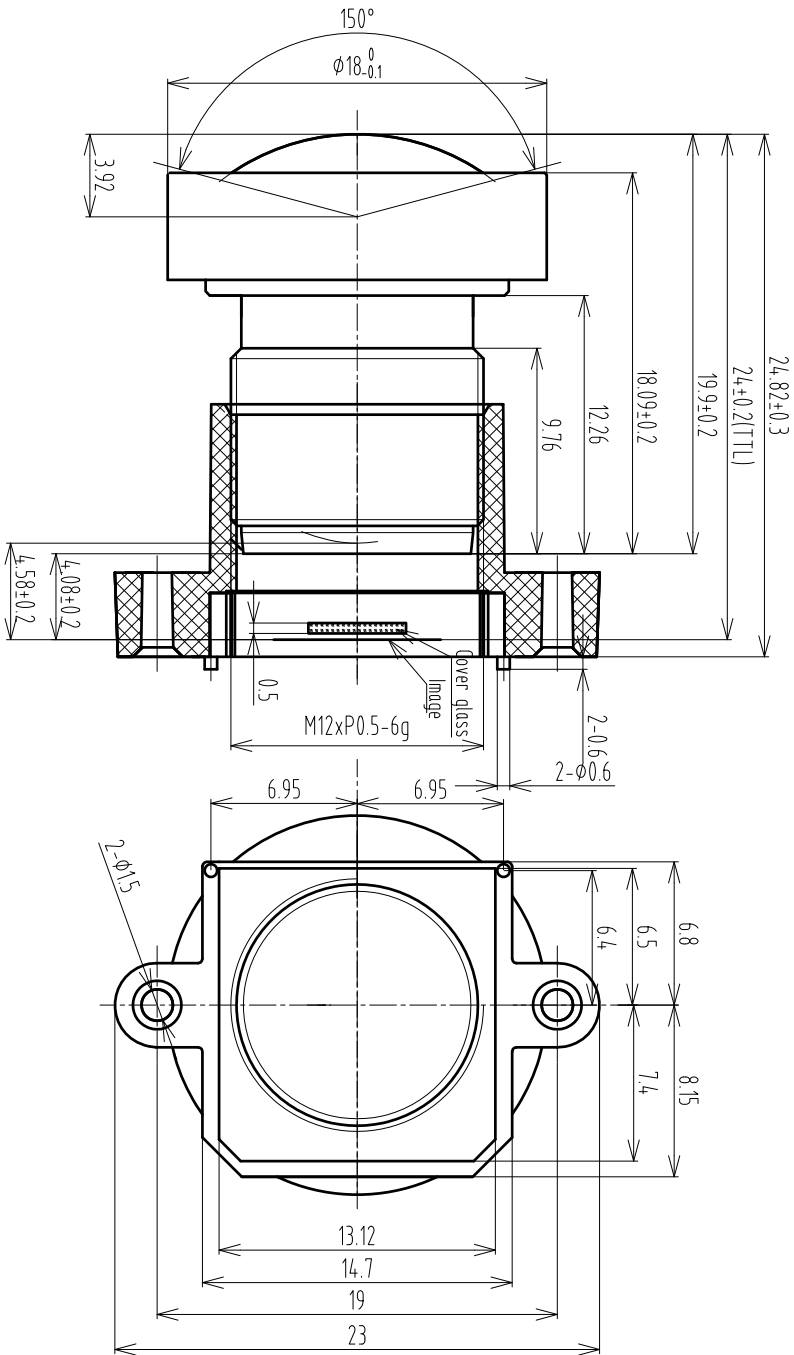




Main Specification		
Max image		ø8mm
F.No		2.5±5%
EFL		2.8±5%
Relative illumination		>60%
CRA		<15°
FOV(°)	D	150°±5°
	H	123°±5°
	V	93°±5°
FFL(IR (t=0.3)in + (Cover glass(t=0.5)in)		4.08±0.2
BFL(IR (t=0.3)in + (Cover glass(t=0.5)in)		4.58±0.2
TTL		24±0.2
Optical Distortion		<62.9%(D)
RESOLUTION		16M
SURFACE QUALITY		
Center		80-50
Margin		80-50



TOLERANCE:	LINEARITY TOLERANCES	+0.05		三角法	材料(环保)	单位	比例
	ANGULAR TOLERANCES	ARE±30°					
	DRAFT ANGLES	AREA±0.5°/SIDE					
设计					规格书	mm	1:1
校对							
审核							
			名称		CV1622F2 F01	页码	1/1
			部番		CV1622F2 F01-SPEC	版本	版本
版本	处数	更改文件号	担当	变更日期	批准	商品代号	V2